


SERIES 200: TYPE 'A' GENERAL PURPOSE DIRECT IMMERSION PLATINUM RTD — ORDERING INFORMATION

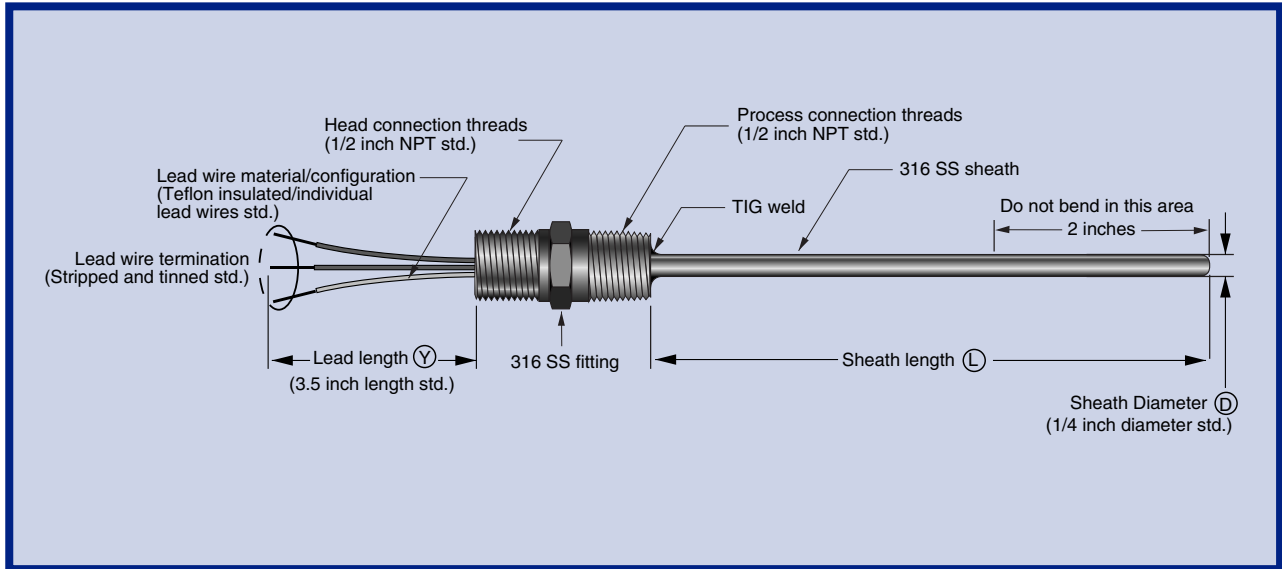

200A	Code	Accuracy Options	Code	Element/Lead Wire Configuration	Code	Connection head	Code	Sheath length (L)
	10	± .10% at 0°C	A	Three wire single element	1C	Cast iron weatherproof	035	3.5 inch
	05	± .05% at 0°C	B	True four wire single element	1E	Epoxy coated cast iron weatherproof	055	5.5 inch
			C	Three wire dual element	2A	Aluminum weatherproof (single element only)	085	8.5 inch
					2E	Epoxy coated aluminum weather proof (single element only)	115	11.5 inch
					5A	Explosion proof aluminum (use with TL transmitter)	175	17.5 inch
					5E	Epoxy coated aluminum (use with TL transmitter)	235	23.5 inch
					9P	Polypropylene	L	Specify sheath length in inches
					10A	Explosion proof aluminum with window for TLI indicating transmitter (When ordering 10A head, specify LY12 for 12" leads in option square below)		Example: For a 6.0 inch (L) length specify 060
					N	No connection head		For a 13.5 inch (L) length specify 135

200A	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	/	<input type="text"/>	/	<input type="text"/>
Basic order code					Options Transmitter see page 13			
Leave blank if none required								